

IMPORTANT!

Read and understand the owner's manual before attempting to install or use your new DiamondBack product.



Owner's Manual Kubota RTV Roof 500, 900, 910, 1100 and 1140

Roof Installation

Parts: KUBOTA RTV 500

- (1) Roof
- (4) **1.5" Mounting Brackets**
- (4) 1/4" x 1" SS Carriage Bolts
- (4) rubber washers
- (4) Zinc Washers
- (4) 1/4" Nylock Nuts
- Adhesive Foam Tape

Parts: KUBOTA RTV 900, 910 or 1100

- (1) Roof
- (4) **1.75" Mounting Brackets**
- (4) 1/4" x 1" SS Carriage Bolts
- (4) rubber washers
- (4) Zinc Washers
- (4) 1/4" Nylock Nuts
- Adhesive Foam Tape

Parts: KUBOTA RTV 1140 Crew

- (1) Roof – Front and Back Piece
- (5) 2" Mounting Brackets
- (2) 1.75" Mounting Brackets
- (7) 1/4" x 1" SS Carriage Bolts
- (7) rubber washers
- (7) Zinc Washers
- (7) 1/4" Nylock Nuts
- Adhesive Foam Tape



Tools Needed:

Ratchet with 7/16" socket

Drill with 1/4" Drill Bit
Pliers or Channel locks
Marker

KUBOTA 500, 900, 910, and 1100 Installation Instructions.

1. Place Roof Panel on top of UTV Roll cage and center front to back, and left to right.
2. Using **Figure 1 (for 500)** and **2 (for 900, 910 or 1100)** Below – place UTV Roof Mounting Brackets around roll cage bar and using a marker, mark the position of the holes needed in the roof for each Roof Mounting bracket.

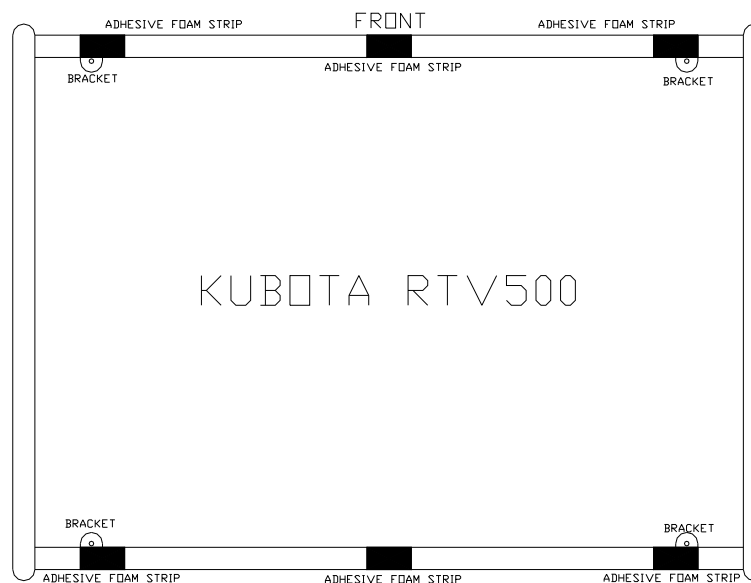


Figure 1


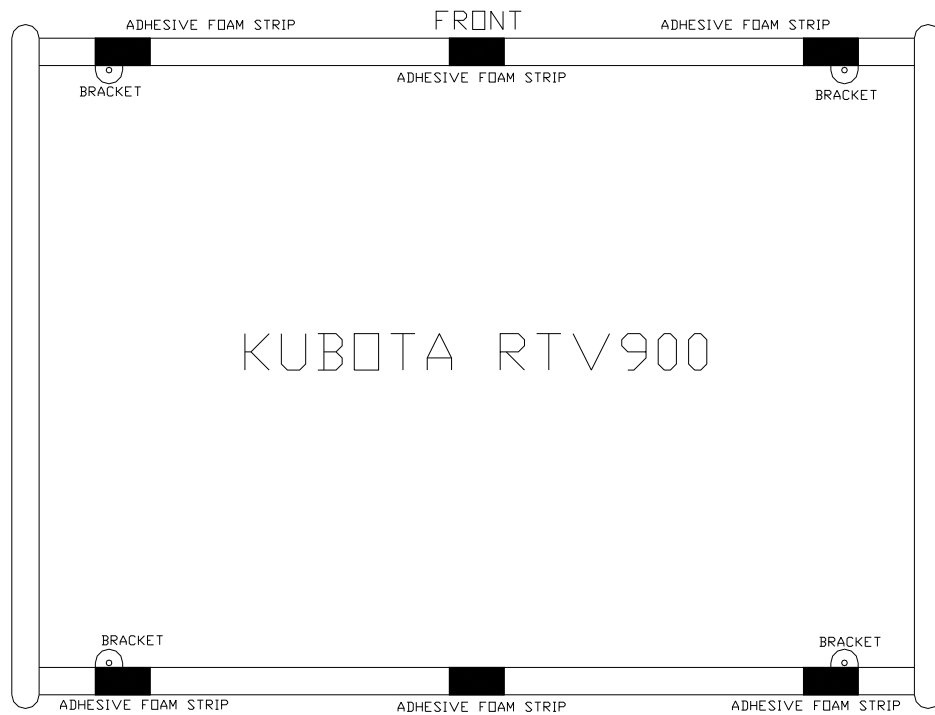


Figure 2

3. Next, remove the roof from the roll cage and using a drill with 1/4" bit, drill holes using the marks as a guide.
4. Cut (4) 3" strips of adhesive foam and apply to roof in between holes to prevent roof rattling once mounted. Foam should run in the direction of the roll cage as shown in Figure 1 above.
5. Next, reposition the roof on the roll cage according to step 1.
6. Prior to attaching the roof mount brackets, cut the remaining adhesive foam in half and apply one section to the roof in the center of the roof where roof and each roll cage bar meet as shown in Figures 1 above. If additional tape is required to prevent rattling it can be purchased from any hardware store as window sealant foam tape.
7. Next, attach the roof mount brackets according to **Figure 4 on next page**. Use channel locks or pliers to hold top of carriage bolt and turn nut with 7/16" socket.

Figure 4

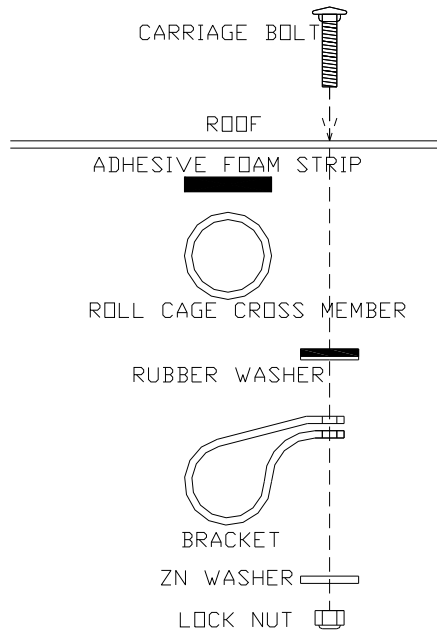


Trouble Shooting

Roof Rattling: Metal Roofs can cause rattle where they are in contact with metal on the UTV. DiamondBack has provided foam tape to prevent this issue. If roof continues to rattle, please follow the following steps.

1. Check to ensure that all nuts and brackets are not loose.
2. Identify any places where the roof may be contacting metal on the UTV. Use the provided foam tape to place a barrier between these portions. If additional foam tape is needed it can be obtained under the window seal department of any hardware store.
3. Additional roof mount brackets may also be purchased under the Conduit Bracket department of any hardware store. Additional brackets will limit vibration.

Kubota 1140 Crew Installation Instructions

1. Place Roof Panels on top of UTV Roll cage and center front to back, and left to right. Place the rear portion of the roof on first, followed by the front portion. Front portion should overlap the rear portion approximately 5”.
2. Using **Figure 3** Below – place UTV Roof Mounting Brackets around roll cage bar and using a marker, mark the position of the holes needed in the roof for each Roof Mounting bracket. **Where panels overlap, mark on panel which will contact the mounting bracket. Second hole will be drilled later.**

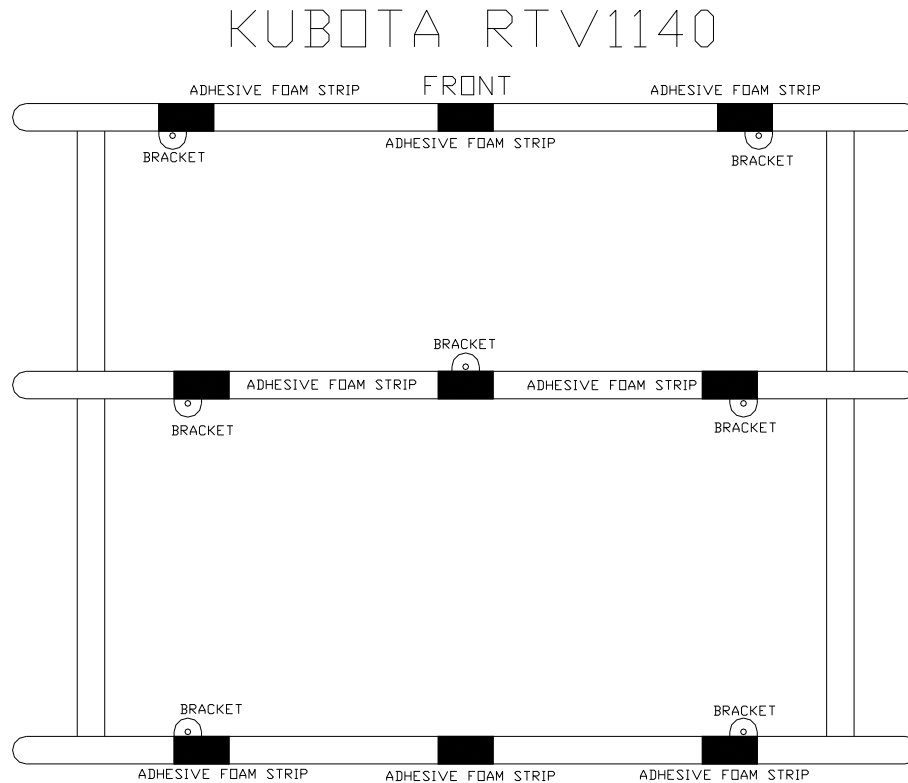

3. Next, remove the roof panels from the roll cage and using a drill with 1/4” bit, drill holes using the marks as a guide. For portion where panels overlap, drill hole in panel with mark on it. Additional hole will be drilled once the panels are on UTV.
4. Cut (7) 3” strips of adhesive foam and apply to roof next to the hole to prevent roof rattling once mounted. Foam should run in the direction of the roll cage as shown in Figure 5 above.
5. Next, reposition the roof panels on the roll cage according to step 1.
6. Prior to attaching the roof mount brackets, cut the remaining adhesive foam in 1/3 and apply one section to the roof in the center of the roof where roof and each roll cage bar meet as shown in Figures 5 above. If additional tape is required to prevent rattling it can be purchased from any hardware store as window sealant foam tape.
7. Next, attach the front and rear roof mount brackets according to **Figure 6 on next page**. Use channel locks or pliers to hold top of carriage bolt and turn nut with 7/16” socket.
8. Then, once front and rear brackets are attached, use holes in the center where panel overlap as a guide to drill through the section of the roof which overlaps. Once holes have been drilled through both panels, attached mounting brackets through both panels according to **Figure 6**.

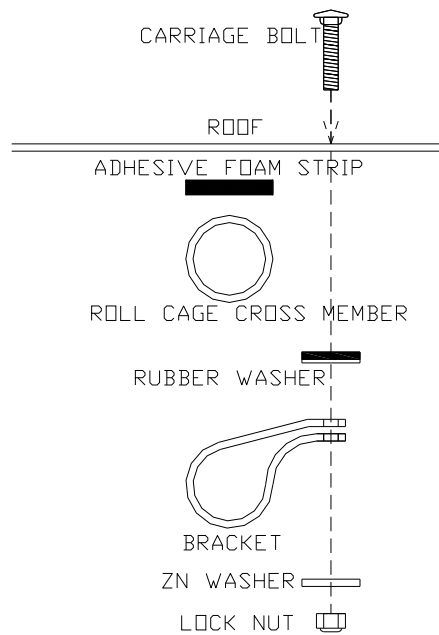


Figure 6

Trouble Shooting

Roof Rattling: Metal Roofs can cause rattle where they are in contact with metal on the UTV. DiamondBack has provided foam tape to prevent this issue. If roof continues to rattle, please follow the following steps.

4. Check to ensure that all nuts and brackets are not loose.
5. Identify any places where the roof may be contacting metal on the UTV. Use the provided foam tape to place a barrier between these portions. If additional foam tape is needed it can be obtained under the window seal department of any hardware store.
6. Additional roof mount brackets may also be purchased under the Conduit Bracket department of any hardware store. Additional brackets will limit vibration.

Warranty

DiamondBack Automotive Accessories Incorporated Limited Warranty

This LIMITED WARRANTY, made by DiamondBack Automotive Accessories Incorporated, is issued to the original retail purchaser of any DiamondBack Automotive Accessories Inc. product.

DiamondBack Automotive Accessories Inc. hereby warrants that our products will be without defect in material or manufacture for a period of (3) years after the original retail purchase date. This warranty covers gas springs, locks and locking mechanisms, weather seal, trim, and cleats. DiamondBack Automotive Accessories warrants all powder coated covers to be without defect in adhesion for a period of (3) years following the retail purchase of the cover. This warranty does not apply to ATV packages or coatings damaged by abrasion due to loading or unloading materials on the cover.

Diamondback Automotive Accessories, Inc. hereby warrants that our products will be without structural and manufacturing defects for a period of (3) years following the original retail purchase. This (3) year warranty covers only the structural components and does not include any parts or materials used in the workings of the cover. This warranty does not apply if structural damage is caused by over-loading the cover beyond either the load capacity specified by DiamondBack Truck Accessories, or the load capacity of the truck with which the DiamondBack product is used.

If the purchaser discovers that a DiamondBack Automotive Accessories Inc. product is defective in material or manufacture within the period of (3) years of purchase or is structurally defective in manufacture within a period of (3) years, that person shall contact DiamondBack Automotive Accessories, Inc. and a representative of the company will inspect the product. If a material or manufacturing defect is determined to exist, DiamondBack Automotive Accessories, Inc. shall exercise its option to either repair or replace the defective part(s).

This Warranty shall be considered void if the product is shown to have been abnormally used, misused, improperly maintained, or altered in any way by anyone other than an authorized DiamondBack Automotive Accessories, Inc. dealer or manufacturer. This warranty does not cover damaged material or structure due to accident or misuse of the DiamondBack product.

This Warranty is the only warranty applicable to the purchase of a DiamondBack Automotive Accessories, Inc. product. DiamondBack Automotive Accessories, Inc. hereby disclaims any and all other warranties, express or implied, including the implied warranty of fitness for a specific use. Diamondback Automotive Accessories, Inc. is not liable for any damages incurred, whether incidental or consequential, due to a breach of this Warranty. The terms of this Warranty shall not be changed in any way, by any person or party. This Warranty guarantees you certain rights. Other rights may vary from state to state.

Warranty Registration

(Want an easier way? Register your warranty online at www.diamondbackcovers.com/owners)

Promotional Code: _____ (Please fill in if your purchase was associated with a mail-in-rebate)

Name: _____ Email Address: _____

Address: _____ City: _____ State: _____ Zip: _____

Products Purchased

UTV Cover (Serial Number under center panel) _____

UTV Roof

Other _____

Date Purchased _____ Purchased From _____

How was your dealer experience? Excellent Satisfactory Poor Other: _____

How did first hear about DiamondBack? Please complete section below.

Website (be specific): _____

Truck Sighting: _____

Print Ad (be specific): _____

Dealer (be specific): _____

Show Appearance (be specific): _____

Other: _____

Referral/Friend: _____

Please give us your comments:

Installation: _____

Use and function of products: _____

Additional Comments: _____

Please Mail to: DiamondBack Truck Covers, ATTN: Warranty Registration, 200 Shady Lane, Philipsburg, PA 16866

Or Fax to: 814-343-4856